Specification

Document No.: NMD-SPC- SK6805SIDE-FRGBW-BW-P6

Product No.: SK6805SIDE-FRGBW-BW-P6

Sample No.: NMD0311

Description: 4.8x1.8x1.6 mm 0.15W Intelligent External Control Surface Mount SMD Side Light Emitting LED

Rev. No.: A/0

Date: 2020-10-23

Customer approval			NMD approval		
Approval	Review	Confirmation	Approval	Review	Confirmation
			朱更生	吴振雷	周 凯
☐Qualified ☐Disqualified Stamp			Stamp		

* Before using our products, please search our company's official website to verify the specification version. The product specification version is updated and cannot be timely notified. Please refer to the official website for the latest information;

* The copyright and final interpretation of the product belong to Shenzhen Normand Electronic Co.,Ltd. If you have special specifications, please contact our engineering staff;

*Official website: http://www.normandled.com

Change History

Date	Rev. No.	Changes/Reason of changes	Signature
2020-01-16	Interim version	Initial Document	KEVIN ZHU
2020-10-23	A/0	Initial issue	KAEN ZHOU

CONTENTS

1、 Product overview.....4
2、 Main Application Field.....4
3、 Description.....4
4、 Mechanical Dimensions.....4
5、 PIN configuration.....5
6、 Recommended dimensions for PCB products.....5
7、General description of product naming.....5
8、 Electrical parameters.....6
9、 Electrical/Optical Characteristics.....6
10、 The IC electrical parameters.....6
11、 Switching characteristics.....7
12、 The data transmission time 7
13 、 Timing waveform..... 8
14、 The method of data transmission.....8
15、 The data structure of 32bit.....9
16、 The typica l application circuit.....9
17、 White Color Temperature Ranks.....10
18、 Standard LED Performance Graph.....11
19、 Packaging Standard.....12
20、 Reliability Test.....13

1. Product Overview :

SK6805SIDE-FRGBW-BW-P6 is a smart LED control circuit and light emitting circuit in one controlled LED source, which has the shape of a 4818 LED chip. Each lighting element is a pixel, and the intensities of the pixels are contained within the intelligent digital interface input. The output is driven by patented PWM technology, which effectively guarantees high consistency of the color of the pixels. The control circuit consists of a signal shaping amplification circuit, a built-in constant current circuit, and a high precision RC oscillator.

The data protocol being used is unipolar RZ communication mode. The 32-bit data is transmitted from the controller to DIN of the first element, and if it is accepted it is extracted pixel to pixel. After an internal data latch, the remaining data is passed through the internal amplification circuit and sent out on the DO port to the remaining pixels. The pixel is reset after the end of DIN. Using automatic shaping forwarding technology makes the number of cascaded pixels without signal transmission only limited by signal transmission speed.

The LED has a low driving voltage (which allows for environmental protection and energy saving), high brightness, scattering angle, good consistency, low power, and long life. The control circuit is integrated in the LED above.

2. Main Application Field:

- **Full color LED string light, LED full color module, LED super hard and soft lights, LED guardrail tube, LED appearance / scene lighting**
- **LED point light, LED pixel screen, LED shaped screen, a variety of electronic products, electrical equipment etc..**

3. Description:

- **Top SMD internal integrated high quality external control line serial cascade constant current IC;**
- **control circuit and the chip in SMD 4818 components, to form a complete control of pixel, color mixing uniformity and consistency;**
- **built-in data shaping circuit, a pixel signal is received after wave shaping and output waveform distortion will not guarantee a line;**
- **The built-in power on reset and reset circuit, the power does not work;**
- **gray level adjusting circuit (256 level gray scale adjustable);**
- **red drive special treatment, color balance;**
- **line data transmission;**
- **plastic forward strengthening technology, the transmission distance between two points over 10M;**
- **Using a typical data transmission frequency of 800 Kbps, when the refresh rate of 30 frames per sec**

4. Mechanical Dimensions:

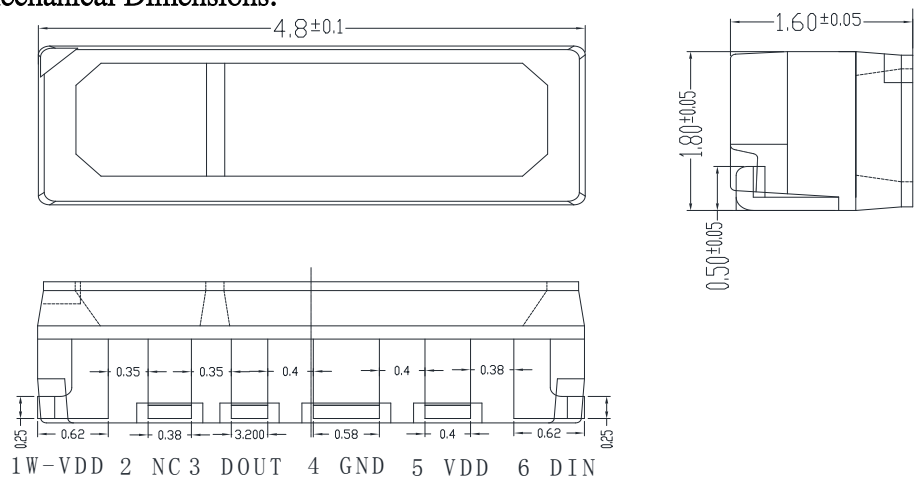

Notes:
1. All dimensions are in millimeters.
2. Tolerance is ±0.1mm unless otherwise noted

5. PIN configuration

NO.	Symbol	Function description
1	W-VDD	Power supply LED
2	NC	NC (This pin does not do circuit design)
3	DOUT	Control data signal output
4	GND	Ground
5	VDD	Power supply LED
6	DIN	Control data signal input

6. Recommended dimensions for PCB products

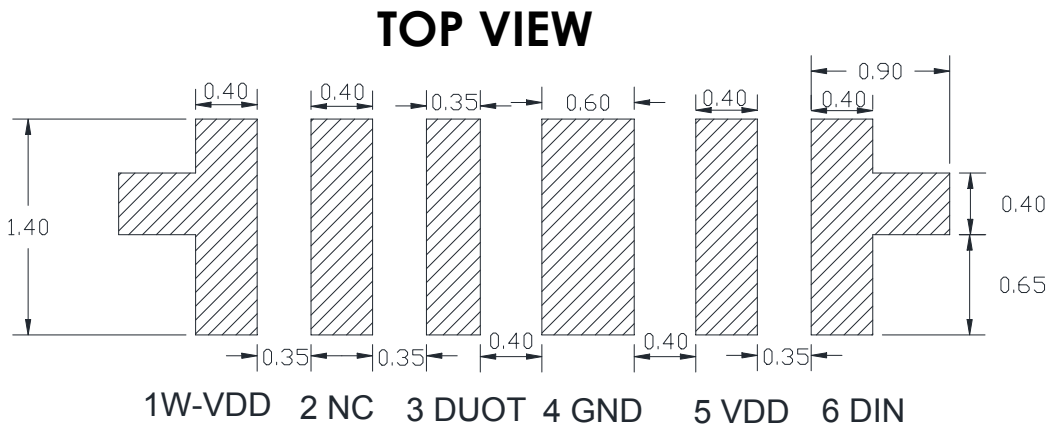

7. General description of product naming.

SK 6805 SIDE-F RGBW-BW-P6

① ② ③ ④ ⑤

①	②	③	④	⑤
Series	IC series and current code	Boundary dimension	Light color type	Number of pins
The default is to integrate the RGB and X chip with the IC	Refers to the 68 series IC R/G/B;5MA current W:12MA current version	Side-f: refers to 4.8x1.8x1.6mm F-shaped outline package	R:RED G:GREEN B:BLUE W-BW: Blue White	P6: 6 pins

8. Electrical Parameters（Ta=25℃,VSS=0V）：

Parameter	Symbol	Range	Unit
Power supply voltage	VDD	+3.7～+5.5	V
Logic input voltage	V_{IN}	-0.5～VDD+0.5	V
Working temperature	Topt	-40~+85	℃
Storage temperature	Tstg	-40~+85	℃
ESD pressure(HBM)	V_{ESD}	2K	V
ESD pressure(DM)	V_{ESD}	200	V

9. Electrical/Optical Characteristics:

Color	SK6805SIDEFRGBW-BW-P6	
	Dominate avelength(nm)	Luminance(mcd)
Red	620-630	120-240
Green	515-530	320-580
Blue	460-475	80-160
WHITE	5500-10000K	1050-1500

10. The IC electrical parameters (unless otherwise specified, TA=-20 ~ +70 ℃, VDD=4.5 ~ 5.5V, VSS=0V):

Parmeter	Symbol	Min	Typical	Max	Unit	Test conditions
The chip supply voltage	VDD	---	5.2	---	V	---
The signal input flip threshold	VIH	0.7* VDD	---	---	V	VDD=5.0V
	VIL	---	---	0.3*V DD	V	
The frequency of PWM	FPWM	---	4.0	---	KHZ	---
Static power consumption	IDD	---	0.29	---	mA	---

11. Switching characteristics(Ta=25 ℃):

Parameter	Symbol	Min	Typical	Max	Unit	Test conditions
The speed of data transmission	fDIN	---	800	---	KHZ	The duty ratio of 67% (data 1)
DOUT transmission delay	TPLH	---	---	500	ns	DIN→DOUT
	TPHL	---	---	500	ns	
IOUT Rise/Drop Time	Tr	---	100	---	ns	VDS=1.5
	Tf	---	100	---	ns	

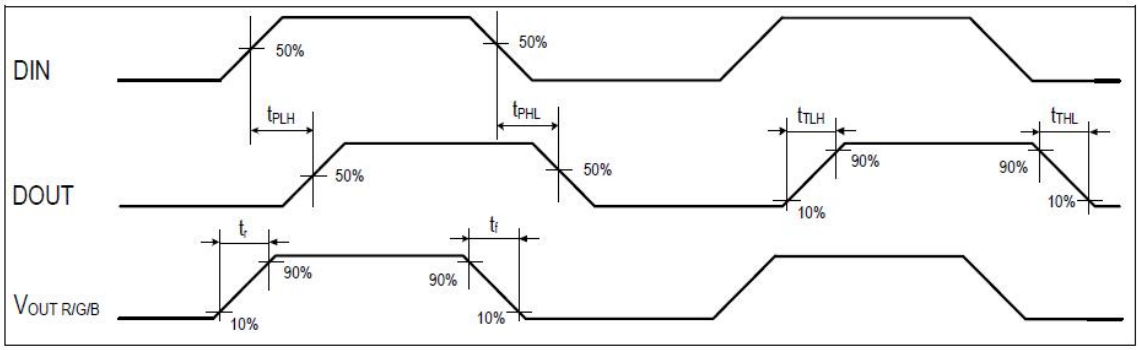

12. The data transmission time :

Name		Min.	Standard value	Max.	Unit
T	**Code period**	**1.20**	**--**	**--**	**μs**
T0H	0 code, high level time	**0.2**	**0.3**	**0.4**	**μs**
T0L	0 code, low level time	**0.8**	**--**	**--**	**μs**
T1H	1 code, high level time	**0.62**	**0.75**	**1.0**	**μs**
T1L	1 code, low level time	**0.2**	**--**	**--**	**μs**
Trst	Reset code，low level time	**>80**	**--**	**--**	**μs**

1. The protocol uses a unipolar zeroing code. Each symbol must have a low level. Each symbol in this protocol starts with a high level. The high time width determines the "0" or "1" code. .
2. When writing programs, the minimum symbol period is 1.2 μ s.
3. The high time of “0” code and “1” code should be in accordance with the stipulated range in the above table. The low time requirement of “0” code and “1” code is less than 20 μ s.

13. Timing waveform:

Input code:

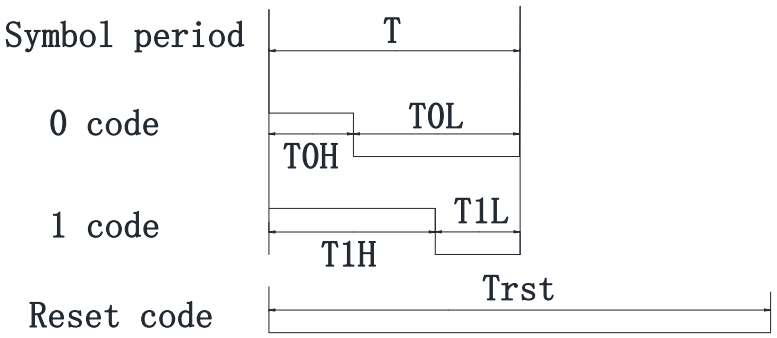

Connection mode:

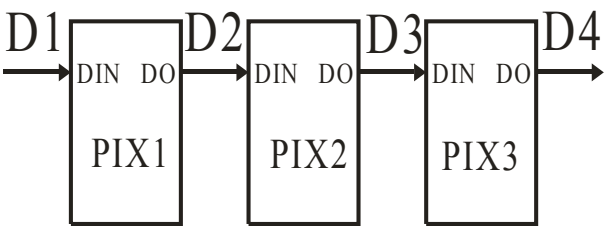

14. The method of data transmission:

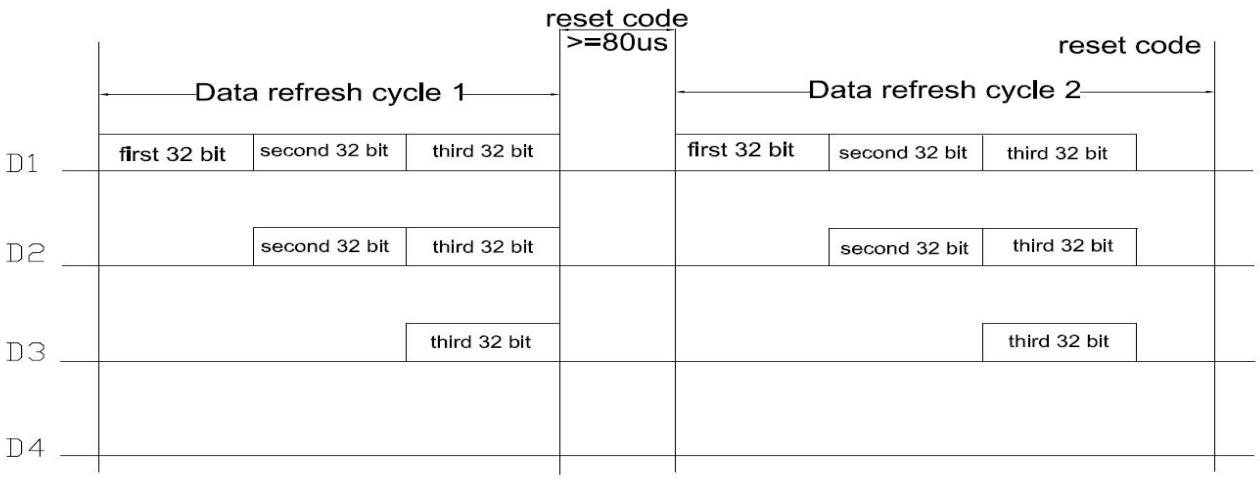

Note: the D1 sends data for MCU, D2, D3, D4 for data forwarding automatic shaping cascade circuit.

15. The data structure of 32bit:

G7	G6	G5	G4	G3	G2	G1	G0	R7	R6	R5	R4
R3	R2	R1	R0	B7	B6	B5	B4	B3	B2	B1	B0
W7	W6	W5	W4	W3	W2	W1	W0				

Note: high starting, in order to send data (G7 - G6 - ....W0)

16. The typical application circuit:

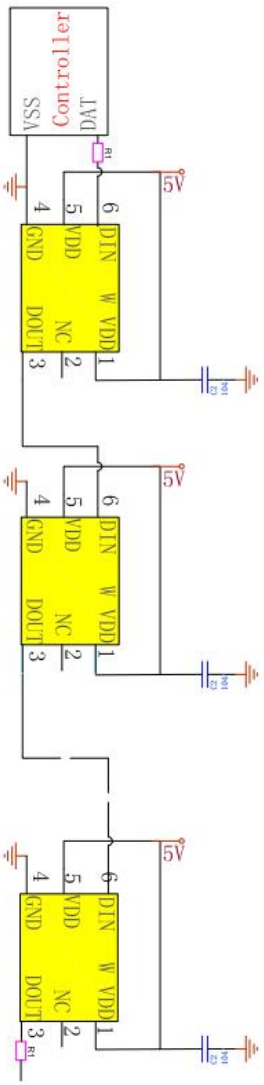

In the practical application circuit, the signal input and output pins of the IC signal input and output pins should be connected to the signal input and output terminals. In addition, in order to make the IC chip is more stable, even the capacitance between beads is essential back;

Application: used for soft lamp strip or hard light, lamp beads transmission distance is short, suggested in signal in time the clock line input and output end of each connected in series protection resistors, R1 of about 500 ohms.

Application: for module or general special-shaped products, lamp beads transmission distance is long, because of different wire and transmission distance, in the signal in time clock at both ends of the line on grounding protection resistance will be slightly different; to the actual use of fixed;

17. White Color Temperature Ranks & CIE Color Rank (Refer to CIE 1931 chromaticity diagram)

CIE chromaticity coordinates (ANSI Cool White)

Name	X1	Y1	X2	Y2	X3	Y3	X4	Y4
BW-A	0.2928	0.2822	0.2802	0.2895	0.2885	0.3007	0.3011	0.2934
BW-B	0.3011	0.2934	0.2885	0.3007	0.302	0.3189	0.3147	0.3116
BW-C	0.3147	0.3116	0.302	0.3189	0.3186	0.3412	0.3313	0.3339
BW-D	0.3313	0.3339	0.3186	0.3412	0.3326	0.36	0.3449	0.3522

ANSI Blue White Color bin structures

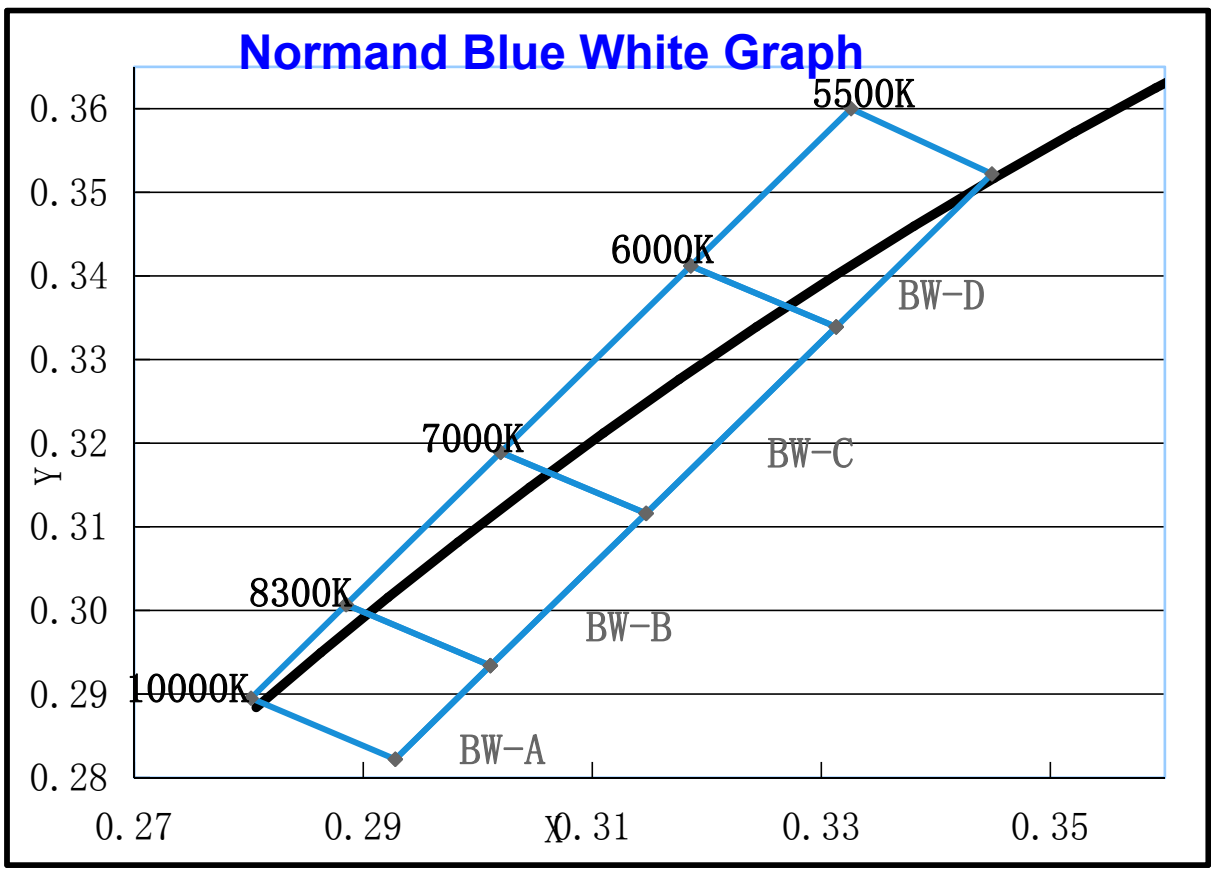

CIE chromaticity coordinates (ANSI Natural white)

名称	X1	Y1	X2	Y2	X3	Y3	X4	Y4
NO-A	0.358	0.3445	0.3461	0.3521	0.3531	0.36	0.3651	0.3524
NA-A	0.3651	0.3524	0.3531	0.36	0.3602	0.3679	0.3722	0.3603
NB-A	0.3722	0.3603	0.3602	0.3679	0.3659	0.3743	0.3779	0.3667
NC-A	0.3779	0.3667	0.3659	0.3743	0.3716	0.3807	0.3836	0.373
ND-A	0.3836	0.373	0.3716	0.3807	0.3773	0.3871	0.3893	0.3794
NE-A	0.3893	0.3794	0.3773	0.3871	0.3844	0.3949	0.3963	0.3873

ANSI Natural White Color bin structures

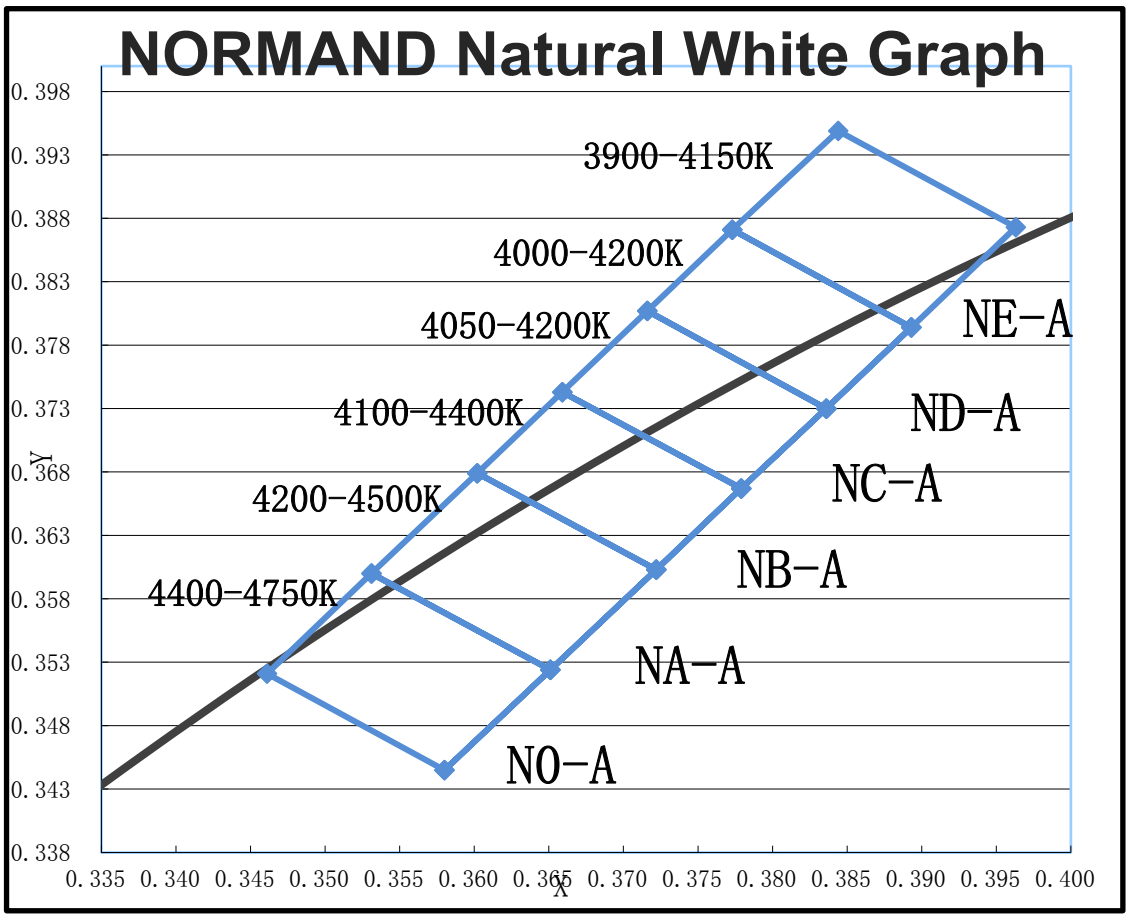

CIE chromaticity coordinates (ANSI Warm White)

名称	X1	Y1	X2	Y2	X3	Y3	X4	Y4
K1-A	0.4344	0.4032	0.4221	0.3984	0.4147	0.3814	0.426	0.3853
K2-A	0.443	0.4212	0.4299	0.4165	0.4221	0.3984	0.4344	0.4032
K3-A	0.4562	0.426	0.443	0.4212	0.4344	0.4032	0.4465	0.4071
K4-A	0.4465	0.4071	0.4344	0.4032	0.426	0.3853	0.4373	0.3893
L1-A	0.4586	0.4103	0.4465	0.4071	0.4373	0.3893	0.4483	0.3918
L2-A	0.4687	0.4289	0.4562	0.426	0.4465	0.4071	0.4586	0.4103

ANSI Warm White Color bin structures

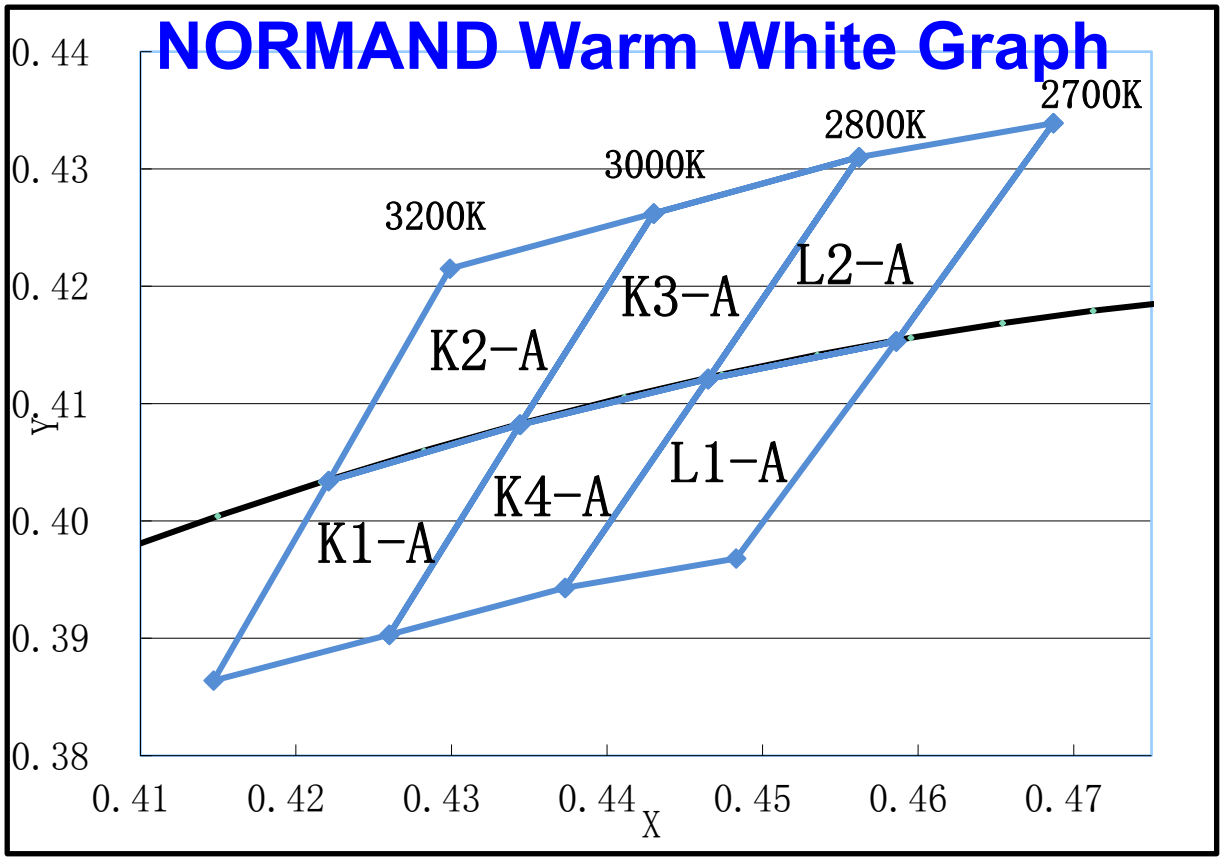

18. Standard LED Performance Graph:

Thermal Pad Temperature vs. Relative Light Output

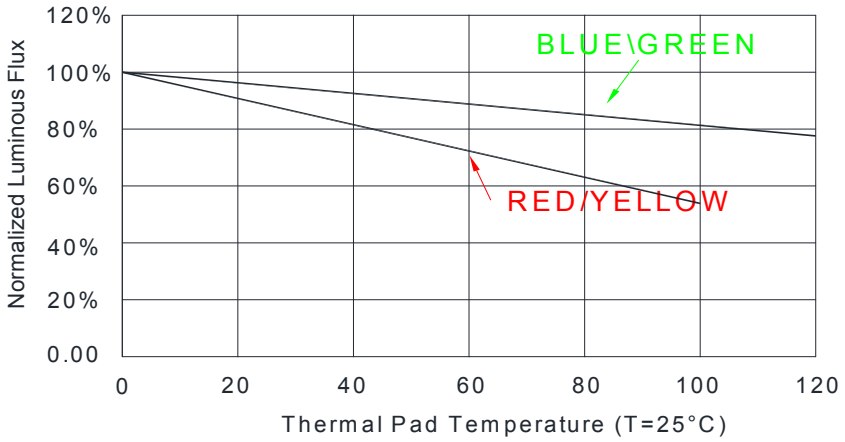

Wavelength Characteristics

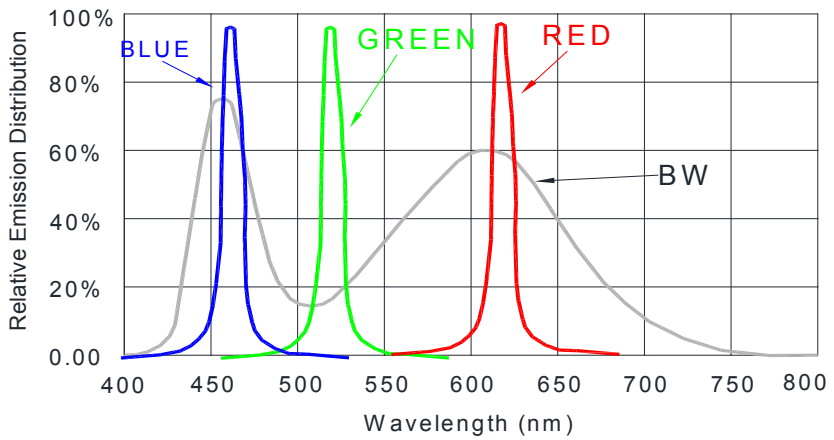

Typical Radiation Pattern 120°

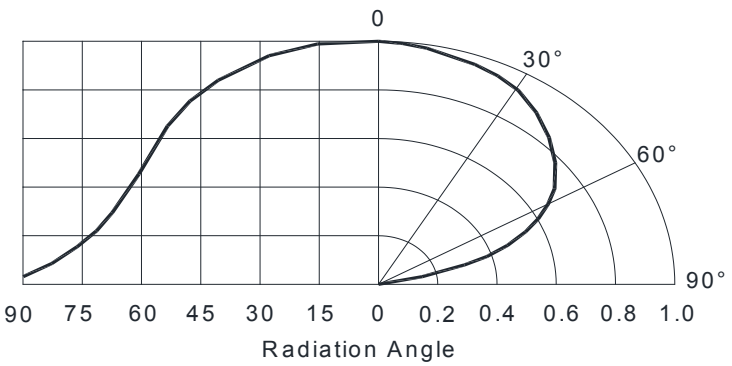

19. Packaging Standard:

Temporarily omitted

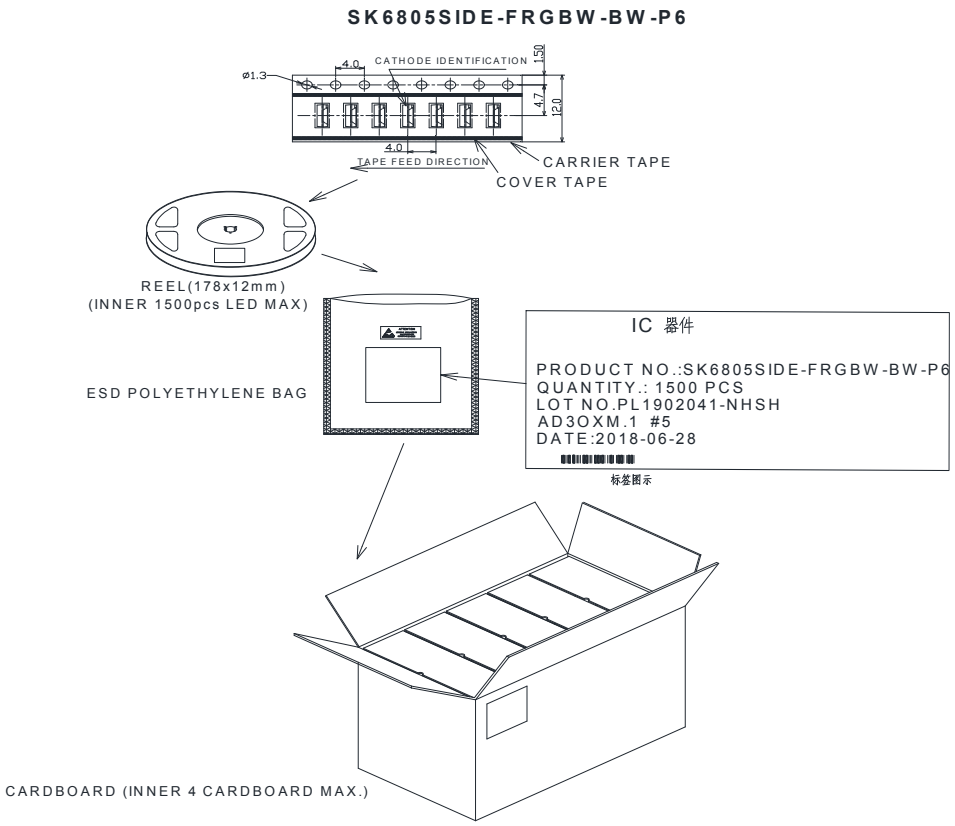

The reel pack is applied in SMD LED. The LEDs are packed in cardboard boxes after packaging in normal or anti-electrostatic bags. cardboard boxes will be used to protect the LEDs from mechanical shocks during transportation. The boxes are not water resistant and therefore must be kept away from water and moisture.

20. Reliability Test :

NO.	Test item	Test Conditions	Reference	Criterion
1	Thermal Shock	100 ± 5° C ~ -40° C ± 5° C 15min~15min 100 cycles	MIL-STD-202G	0/22
2	High Temperature Storage	Ta= +100°C 1000hrs	JEITA ED-4701 200 201	0/22
3	Low Temperature Storage	Ta= -40°C 1000hrs	JEITA ED-4701 200 202	0/22
4	High Temperature High Humidity Storage	Ta=60°C RH=90% 1000hrs	JEITA ED-4701 100 103	0/22
5	Temperature Cycle	-40°C~25°C~100°C~25°C 30min~5min~30min~5min 100 cycles	JEITA ED-4701 100 105	0/22
6	Resistance to Soldering Heat	Tsld = 260° C, 10sec. 2 times	JEITA ED-4701 300 301	0/22
7	Room temp Life Test	25° C, IF: Typical current , 1000hrs	JESD22-A 108D	0/22

Criteria for Judging the Damage:

Item	Symbol	Test Condition	Limit	
			Min	Max
Luminous Intensity	IV	DC=5V, Typical current	Init. Value*0.7	---
Resistance to Soldering Heat	---	DC=5V, Typical current	No dead lights or obvious damage	